


	Technical Specification	FN.	20190309-01
		Rev.	A-0
	LV Power Cable 0.6/1kV	Date	2026-05-12
		Page	1 / 4

CU/V-90/5V-90 0.6/1kV LV Power Cable

1. Standard compliance

Item	Standard
Cable design	AS/NZS 5000.1
Conductor	AS/NZS 1125
Insulating and sheathing material	AS/NZS 3808

2. Construction

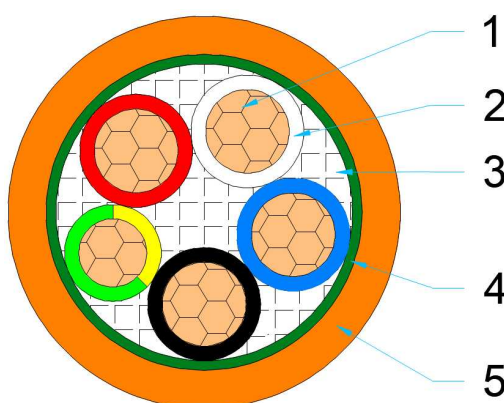

No.	Construction	Specification
1	Conductor	Class 2 plain annealed stranded circular copper conductor as per AS/NZS 1125
2	Insulation	V-90 as per AS/NZS 3808
3	Filler	PP rope
4	Binder tape	Non-woven tape
5	Outer sheath	5V-90 (UV resistant) as per AS/NZS 3808, Orange or as per client's requirements

3. Cable identification & Packing

Item	Requirement
Core identification:	2C+E : Red、Black、 G/Y
	3C+E : Red、 White、 Blue、 G/Y
	4C+E : Red、 White、 Blue、 Black、 G/Y
Printing Colour:	White colour text on Black sheath or Black colour text on Other colour sheath
Cable marking by printing:	e.g.: **** CABLES ELECTRIC CABLE CU/V-90/5V-90 4C50+E16MM2 0.6/1kV AS/NZS 5000.1 2026 xxxxM
Printing criteria:	By printing in one line on the surface of outer sheath. The distance between the end of one block of marking and the beginning of the next shall not exceed 550 mm. Meter marking interval is every one meter.
Packing length in meters:	As per cable schedule
Type of drum:	Steel-wooden/Wooden/Plywood/Steel Drum

4. Electrical properties

	Technical Specification	FN.	20190309-01
		Rev.	A-0
	LV Power Cable 0.6/1kV	Date	2026-05-12
		Page	2 / 4

Item	Specification
Voltage grade	0.6/1kV
Permissible frequency variation	49Hz~61Hz
Normal use conductor temperature at rated current	75°C
Max. permissible conductor temperature	90°C (See note 3&4)
Max. conductor temp. at the end of short circuit	160°C
Ambient temperature during operation	-15°C~55°C
Lowest temperature during installation	0°C
Test voltage	3.5kV AC/5 min. (50 Hz)

5. Construction characteristics

Dimensions									
No. of cores & CSA	Minimum number of wires in conductor		Approx. dia. of conductor		Insulation thickness (Nom.)		Outer sheath thickness (Nom.)	Approx. OD of cable	Approx. weight of cable
	Phase	Earth	Phase	Earth	Phase	Earth			
Sq.mm	Nos.	Nos.	mm	mm	mm	mm	mm	mm	kg/km
2C1.5+E1.5	3	3	1.5	1.5	0.8	0.8	1.8	11.4±1.0	150.2
2C2.5+E2.5	3	3	2.01	2.01	0.8	0.8	1.8	12.5±1.0	194.1
2C4+E2.5	7	3	2.55	2.01	1.0	0.8	1.8	14.0±1.0	250.6
2C6+E2.5	7	3	3.1	2.01	1.0	0.8	1.8	15.0±1.0	303.6
2C10+E4	7	7	4.0	2.55	1.0	1.0	1.8	16.9±1.0	420.8
2C16+E6	7	7	5.0	3.1	1.0	1.0	1.8	18.8±1.0	580.0
2C25+E6	6	7	6.0	3.1	1.2	1.0	1.8	21.7±1.0	805.8
2C35+E10	6	7	7.0	4.0	1.2	1.0	1.8	23.6±1.0	1049.5
2C50+E16	6	7	8.2	5.0	1.4	1.0	1.8	27.0±1.0	1418.5
2C70+E25	12	6	9.8	6.0	1.4	1.2	1.9	30.4±1.0	1968.3
3C1.5+E1.5	3	3	1.5	1.5	0.8	0.8	1.8	12.2±1.0	180.3
3C2.5+E2.5	3	3	2.01	2.01	0.8	0.8	1.8	13.5±1.0	236.3
3C4+E2.5	7	3	2.55	2.01	1.0	0.8	1.8	15.2±1.0	314.6
3C6+E2.5	7	3	3.1	2.01	1.0	0.8	1.8	16.2±1.0	388.3
3C10+E4	7	7	4.0	2.55	1.0	1.0	1.8	18.4±1.0	546.6
3C16+E6	7	7	5.0	3.1	1.0	1.0	1.8	20.6±1.0	764.8
3C25+E6	6	7	6.0	3.1	1.2	1.0	1.8	23.4±1.0	1075.5
3C35+E10	6	7	7.0	4.0	1.2	1.0	1.8	25.8±1.0	1424.7
3C50+E16	6	7	8.2	5.0	1.4	1.0	1.9	29.6±1.0	1923.2
3C70+E25	12	6	9.8	6.0	1.4	1.2	2.0	33.6±1.0	2683.8
4C1.5+E1.5	3	3	1.5	1.5	0.8	0.8	1.8	13.1±1.0	212.3
4C2.5+E2.5	3	3	2.01	2.01	0.8	0.8	1.8	14.5±1.0	281.0
4C4+E2.5	7	3	2.55	2.01	1.0	0.8	1.8	16.6±1.0	384.3
4C6+E2.5	7	3	3.1	2.01	1.0	0.8	1.8	17.9±1.0	481.2
4C10+E4	7	7	4.0	2.55	1.0	1.0	1.8	20.3±1.0	681.6

	Technical Specification						FN.	20190309-01
							Rev.	A-0
	LV Power Cable 0.6/1kV						Date	2026-05-12
							Page	3 / 4

4C16+E6	7	7	5.0	3.1	1.0	1.0	1.8	22.8±1.0	962.0
4C25+E6	6	7	6.0	3.1	1.2	1.0	1.8	26.2±1.0	1384.1
4C35+E10	6	7	7.0	4.0	1.2	1.0	1.8	28.8±1.0	1819.8
4C50+E16	6	7	8.2	5.0	1.4	1.0	2.0	33.3±1.0	2470.7
4C70+E25	12	6	9.8	6.0	1.4	1.2	2.1	37.7±1.0	3442.2

6. Electrical and Mechanical properties

Characteristics							
No. of cores & CSA	Max. DC resistance of conductor at 20°C		Max. AC resistance of conductor at 75°C	Fault current capacity of conductor (1s)	Max. allowable pulling force of conductor	Min. bending radius	
	Phase	Earth				During installation	Installed
Sq.mm	Ω/km	Ω/km	Ω/km	kA	kN	mm	mm
2C1.5+E1.5	13.6	13.6	16.5	0.17	0.32	69	46
2C2.5+E2.5	7.41	7.41	9.01	0.29	0.53	75	50
2C4+E2.5	4.61	7.41	5.61	0.46	0.74	84	56
2C6+E2.5	3.08	7.41	3.75	0.69	1.02	90	60
2C10+E4	1.83	4.61	2.23	1.15	1.68	102	68
2C16+E6	1.15	3.08	1.4	1.84	2.66	113	76
2C25+E6	0.727	3.08	0.885	2.88	3.92	261	174
2C35+E10	0.524	1.83	0.638	4.03	5.60	284	189
2C50+E16	0.387	1.15	0.471	5.75	8.12	324	216
2C70+E25	0.268	0.727	0.327	8.05	11.55	365	244
3C1.5+E1.5	13.6	13.6	16.5	0.17	0.42	74	49
3C2.5+E2.5	7.41	7.41	9.01	0.29	0.70	81	54
3C4+E2.5	4.61	7.41	5.61	0.46	1.02	92	61
3C6+E2.5	3.08	7.41	3.75	0.69	1.44	98	65
3C10+E4	1.83	4.61	2.23	1.15	2.38	111	74
3C16+E6	1.15	3.08	1.4	1.84	3.78	124	83
3C25+E6	0.727	3.08	0.885	2.88	5.67	281	188
3C35+E10	0.524	1.83	0.638	4.03	8.05	310	207
3C50+E16	0.387	1.15	0.471	5.75	11.62	356	237
3C70+E25	0.268	0.727	0.327	8.05	16.45	404	269
4C1.5+E1.5	13.6	13.6	16.5	0.17	0.53	79	53
4C2.5+E2.5	7.41	7.41	9.01	0.29	0.88	87	58
4C4+E2.5	4.61	7.41	5.61	0.46	1.30	100	67
4C6+E2.5	3.08	7.41	3.75	0.69	1.86	108	72
4C10+E4	1.83	4.61	2.23	1.15	3.08	122	82
4C16+E6	1.15	3.08	1.4	1.84	4.90	137	92
4C25+E6	0.727	3.08	0.885	2.88	7.42	315	210
4C35+E10	0.524	1.83	0.638	4.03	10.50	346	231
4C50+E16	0.387	1.15	0.471	5.75	15.12	400	267

	Technical Specification	FN.	20190309-01
		Rev.	A-0
	LV Power Cable 0.6/1kV	Date	2026-05-12
		Page	4 / 4

4C70+E25	0.268	0.727	0.327	8.05	21.35	453	302
----------	-------	-------	-------	------	-------	-----	-----

Note:

1. The particulars given above are nominal & are subject to normal manufacturing tolerances.
2. All parameter is approximate value for reference only.
3. The maximum permissible temperatures are applicable when there is no chance of thermal deformation or a reasonable chance of human contact in normal use.
4. V-90 and V-90HT insulated cables may be operated up to the maximum permissible temperatures 90°C and 105°C provided that the cable is installed in a manner that is not subject to, or is protected against, severe mechanical pressure at temperatures higher than 75°C.